


Automatic Generator Start

Designed for use with System Control Panel and MS and RS Inverter/Chargers

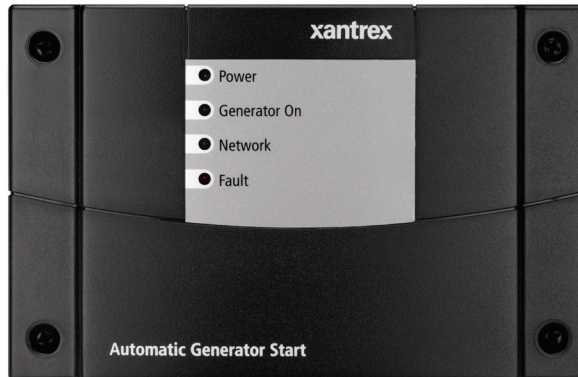

Automatically start and stop a generator as needed.

The Automatic Generator Start (AGS) is a Xanbus Enabled device that can automatically activate a generator to provide an MS or RS Inverter/Charger with power to recharge depleted batteries or assist with heavy loads. Compatible with popular generators, the AGS adds intelligence to power management and eliminates time spent monitoring batteries and inverter loads.

The AGS can be customized to suit each user's preferences. A user can define whether the generator should be activated by low battery voltage, battery state of charge, thermostat operation, or load size on the inverter. A Quiet Time setting prevents the generator from starting at inconvenient times like nightfall. LED lights display the status of the AGS, while all user defined settings are programmed through the System Control Panel.

Product Features

- ▶ Designed for use with the System Control Panel and MS and RS Inverter/Chargers
- ▶ Comprehensive triggers
- ▶ User programmable quiet times and generator start & stop settings
- ▶ Built-in emergency shutdown
- ▶ Compatible with Onan, Kohler, Westerbeke, Northern Lights, Generac, and Powertech generators
- ▶ Meets UL458 Marine and RV standards
- ▶ Xanbus Enabled

Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5
800 670 0707 Toll Free
604 420 1591 Fax

5916 195th Street NE
Arlington, Washington
USA 98223
800 446 6180 Toll Free
360 925 5144 Fax



Automatic Generator Start

Designed for use with System Control Panel and MS and RS Inverter/Chargers

Electrical Specifications	
Communication physical layer	2, CAN
Communication protocol	Xanbus
Maximum cable length	130 ft. (40 m)

Mechanical Specifications	
Dimensions (HxWxD)	5.75 x 3.75 x 1.5" (146 x 95.5 x 37 mm)
Weight	0.5 lb (225 g)
Connectors	2 x Xanbus: RJ45-8 pins 20-contact pluggable connector (Tyco Mate 'n' Lok 2 connector)

Environmental Specifications	
Operating temperature	-4 to 122°F (-20 to 50°C)
Storage temperature	-40 to 185°F (-40 to 85 °C)
Ignition protection	None

Regulatory Compliance	
Safety	CSA certified to CSA 107.1-01 and UL 458 4th Ed. including the Marine Supplement
EMC	FCC part 15B Class B Industry Canada ICES-0003 Class B

Note: Specifications subject to change without notice.

